









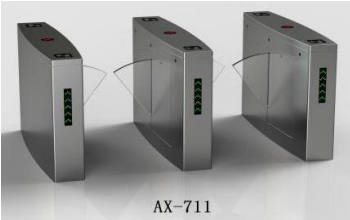

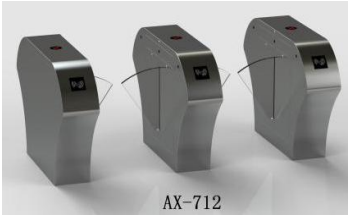

### FLAP TURNSTILE GATE SERIES

IMAGE	MODEL /PRICE	SPEC.	Function
 <p>AX-711</p>	<p><b>AX-711</b> single core \$510/pcs dual core \$780/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
 <p>AX-712</p>	<p><b>AX-712</b> single core \$510/pcs dual core \$780/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
 <p>AX-713</p>	<p><b>AX-713</b> single core \$410/pcs dual core \$670/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:800*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>

 <p>AX-714</p>	<p><b>AX-714</b> single core \$440/pcs dual core \$730/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
 <p>AX-715</p>	<p><b>AX-715</b> single core \$440/pcs dual core \$730/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
 <p>AX-716</p>	<p><b>AX-716</b> single core \$440/pcs dual core \$730/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
 <p>AX-717</p>	<p><b>AX-717</b> single core \$510/pcs dual core \$780/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>

	<p><b>AX-718</b> single core \$440/pcs dual core \$730/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
	<p><b>AX-719</b> single core \$530/pcs dual core \$810/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
	<p><b>AX-720</b> single core \$510/pcs dual core \$780/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
	<p><b>AX-721</b> single core \$600/pcs dual core \$850/pcs</p>	<p>Semi-Automatic/Full Automatic available Size:1200*280*990MM Material:1.5MM 304 stainless steel Arm Length:600MM Channel width≤600-800MM Bearing Capacity:60KG Max Passing capacity:30 People/Min. Power:AC110V-220V,50HZ Working environment: indoor and outdoor Working Times: 5 Million times Protection Grade: IP54 Motor:Brushless DC motor Connection:RS485 Directional:Unidirectional &amp;Bidirectional Infrared Sensor :8pcs Net Weight:75KG Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>

	<p style="text-align: center;"><b>AX-722</b>  <b>single core \$510/pcs</b>  <b>dual core \$780/pcs</b></p>	<p>Semi-Automatic/Full Automatic available  Size:1200*280*990MM  Material:1.5MM 304 stainless steel  Arm Length:600MM  Channel width≤600-800MM  Bearing Capacity:60KG Max  Passing capacity:30 People/Min.  Power:AC110V-220V,50HZ  Working environment: indoor and outdoor  Working Times: 5 Million times  Protection Grade: IP54  Motor:Brushless DC motor  Connection:RS485  Directional:Unidirectional &amp;Bidirectional  Infrared Sensor :8pcs  Net Weight:75KG  Sliding door color: Transparent,Red,Blue</p>	<ul style="list-style-type: none"> <li>▶ Touch ID,Magnetic card, bar code card, ID card and IC card Access control system are optional.</li> <li>▶ Real time trouble self-detect and alarm indication</li> <li>▶ Self automatic locking to prevent forcedly passing without permission.</li> <li>▶ Light and sound alarm indication function, preventing illegal entry or irregular passing.</li> <li>▶ Control panel with counting function, LED digital display function (optional)</li> <li>▶ Emergency measures: Automatic drop arm for safty when power off</li> <li>▶ Support remote control with remote or PC</li> </ul>
---	--	--	---

**Applicable scope**

- 1)Transport: railway stations, subway stations, airports, stations, terminals and so on
- 2)Entertainment: swimming pool, tourist attractions, business clubs, playgrounds, cinemas and so on
- 3)Commercial service places: shopping malls, supermarkets, hotels, clubs, banks and so on
- 4)Science and Education office units: business buildings, government agencies, schools, libraries and so on
- 5)Property units: district, factories, construction sites, new real estate and so on
- 6)Special passage control and so on.

**Remark:**

- 1.The price above is EXW price for machine, exclude access control system,taxes,shipping cost and installation cost.
- 2.Trade Term:EXW,FOB,CFR,CIF,DDU
- 3.Payment Term:Paypal,Western Union,T/T bank transfer (Accept 30% as deposit for pre-production,70% balance before Shipping)
- 4.Delivery Time:in 7-15 days depend on quantity
- 5.Warranty:2 years
- 6.The price is valid for 1 months from the date quoted.
- 7.USD and RMB Exchange Rate:\$1: ¥6.85

**Single core**

**Dual core**

